

DEMANYETİZER

- Demanyetizer, manyetik prosese girmiş demir konsantrenin verimliliğini arttırmak ve statik topaklanmayı kırmak için kullanılır.

Özel malzemeden yapılmış manyetik olmayan boru, bobin tarafından oluşturulan manyetik alanı engellemez.



Borunun içinden geçen konsantre cevher her iki yönde manyetize edilir ve Demanyetizerden çıkan demir cevheri tamamen demanyetize olmuş halde homojen olarak prosese devam eder.

DEMAGNETIZER

- Demagnetizer is used to improve the efficiency of iron concentrate that has entered the magnetic process and to break the static agglomeration.

The non-magnetic tube made by special material does not block the magnetic field generated by the coil.

The concentrated ore passing through the pipe is magnetized in both directions. The output of the machine is completely demagnetized, and it continues the process homogeneously.

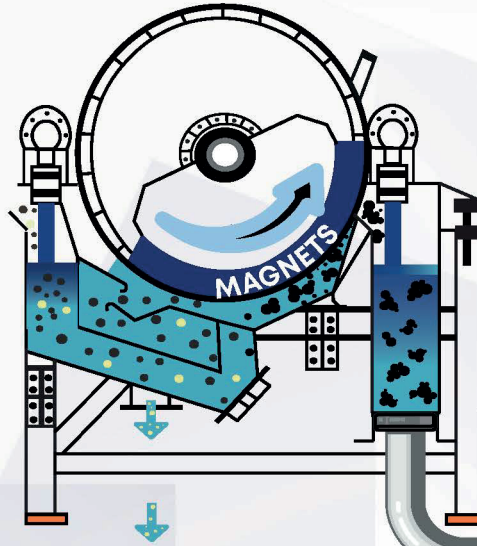

MODEL	Çap (Diameter) Ø (mm)	Güç (Power) (kW)	Kapasite (Capacity) (m ³ /hr)	Akış Hızı (pulp) (m/s)	Voltaj (Voltage) (V)	Akım (Current) (A)
ENG-DMG01	219	<1,6	300	3	380	2-4
ENG-DMG02	273	<1,6	480	3	380	2-4
ENG-DMG03	325	<1,6	700	3	380	2-4

Talep edilen ölçülere uygun özel imalat yapılabilir. Custom manufacturing according to requested dimensions is available.